


Bubblepack



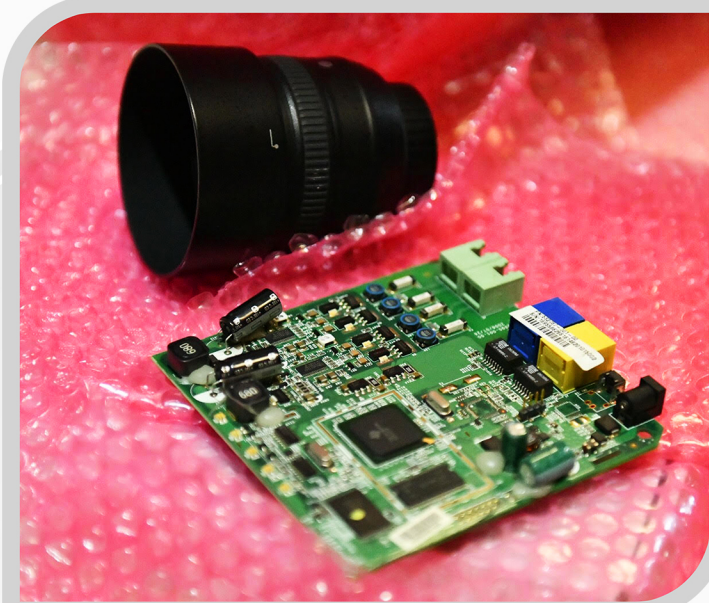

Premium Grade

-100 % Virgin material

- For lightweight, less fragile products with short, predictable distribution cycles
- Available in 3/16" thickness for products requiring surface protection and/or interleaving
- Available in 1/2" thickness for cushioning and/or voidfill for lightweight, less fragile items.
- **Standard Color:** White

Recycled Grade

-50% Pre-Consumer Recycled Content -Economic & environmentally sensible

- **Standard Color:** usually dark, No additional color additives or dyes have been added, dust particles can be visibly seen imbedded on the bubble.

Anti-Static

- High performance static-free characteristics designed to protect electronic components
- Meets all electrical and applicable physical requirements of PPP-C- 795D
- Maximum 2 second decay +/- 5000 to zero volts. Specimen conditioning at 73°F, 15% R.H. for 24 hours
- Surface Resistivity: Less than 1.0×10^{11} OHMS/square. Specimen conditioning at 73°F, 15% R.H. for 24 hours
- **Standard Color:** Light Pink

Multi-Purpose Grade

- For light to medium weight, less fragile products with short or predictable distribution cycles
- For products requiring surface protection, interleaving, cushioning and voidfill
- Minimum 20 % recycled content



P. REMEDIO ST., CABANCALAN
MANDAUE CITY, 6014 PHILIPPINES

TEL: (6332) 344-8490 / (6332) 344-6260 FAX: (6332) 344-6290
MOBILE: +63 922-821-9623 EMAIL: sales.admin@otwayenterprises.com

